


Front view

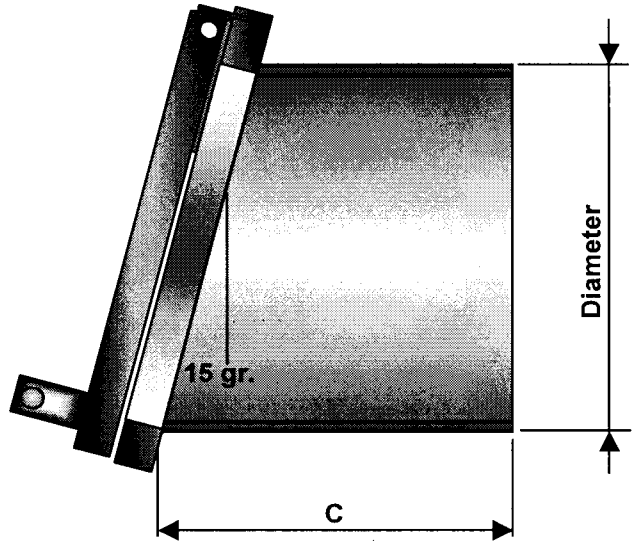

Section

Measurements in mm.

NW	Diameter conical		A	B	C	Weight in kg.
	from	up to				
300	300	290	395	425	500	10
400	400	390	480	510	500	16
500	500	490	580	610	500	22

- Application** : End valve for surface water, sewers and other aggressive environments. Insert the conical tube end of the valve into a concrete- or twin wall pipe. A watertight connection can be obtained with bituminous sealant.
- Max. pressure** : 5 Metres head of water.
- Materials** : Valve- and backplate HDPE.
Solid axle and ballast weight stainless steel 316.
Valve seal EPDM compound is attached on the rear of the flapvalve.
- Remarks** : Larger sizes and special shapes can be produced upon request.