





Top view

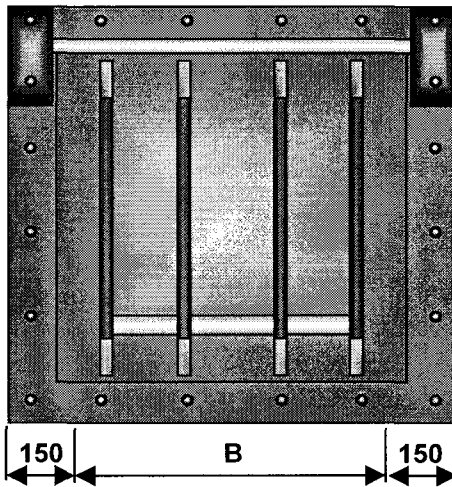

Front view

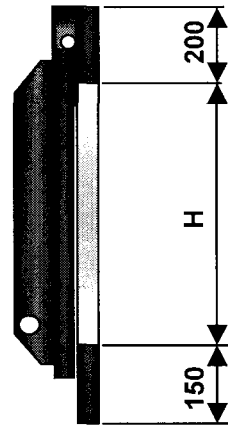

Section

Measurements in mm.

| H    | B | possibilities |     |     |     |      | up to<br>2700 |
|------|---|---------------|-----|-----|-----|------|---------------|
|      |   | 200           | 400 | 600 | 800 | 1000 |               |
| 200  |   | *             | *   | *   | *   | *    | *             |
| 300  |   |               | *   | *   | *   | *    | *             |
| 400  |   |               | *   | *   | *   | *    | *             |
| 500  |   |               |     | *   | *   | *    | *             |
| 600  |   |               |     | *   | *   | *    | *             |
| 700  |   |               |     |     | *   | *    | *             |
| 800  |   |               |     |     | *   | *    | *             |
| 900  |   |               |     |     |     | *    | *             |
| 1000 |   |               |     |     |     | *    | *             |

- Application** : End valve for surface water, sewers and other aggressive environments.
- Max. pressure** : 5 Metres head of water (for a short period).
- Materials** : Valve- and backplate HDPE.  
Solid axle and ballast weight stainless steel 316.  
Valve seal EPDM compound is attached on the rear face of the flapvalve.
- Interface** : EPDM compound between valve and wall.
- Mounting** : Chemical anchor bolts or moulded bolts.
- Remarks** : Larger sizes and special shapes can be produced upon request.