





Top view

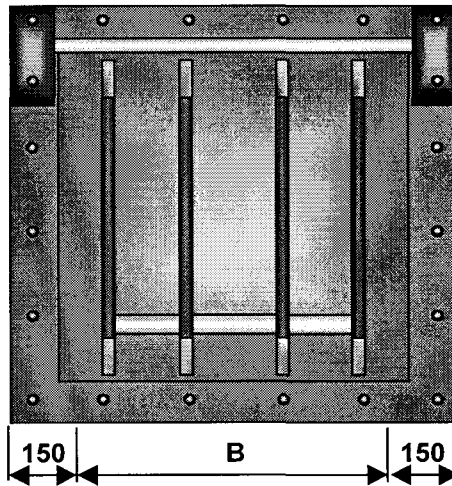

Front view

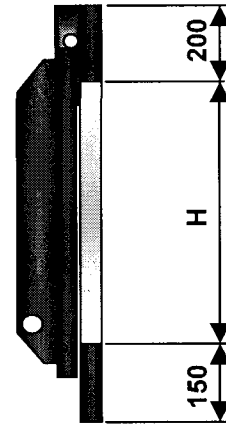

Section

Measurements in mm.

H	B	possibilities					up to 2700
		200	400	600	800	1000	
200		*	*	*	*	*	*
300			*	*	*	*	*
400			*	*	*	*	*
500				*	*	*	*
600				*	*	*	*
700					*	*	*
800					*	*	*
900						*	*
1000						*	*

- Application** : End valve for surface water, sewers and other aggressive environments.
- Max. pressure** : 5 Metres head of water (for a short period).
- Materials** : Valve- and backplate HDPE.
Solid axle and ballast weight stainless steel 316.
Valve seal EPDM compound is attached on the rear face of the flapvalve.
- Interface** : EPDM compound between valve and wall.
- Mounting** : Chemical anchor bolts or moulded bolts.
- Remarks** : Larger sizes and special shapes can be produced upon request.