


Fig.048

ASA-Absperrschieber
aus A105N
DN 15 - 65 800 lbs

ASA-Gate valve
in A105N
Size 1/2" - 2 1/2" 800 lbs



03/2007

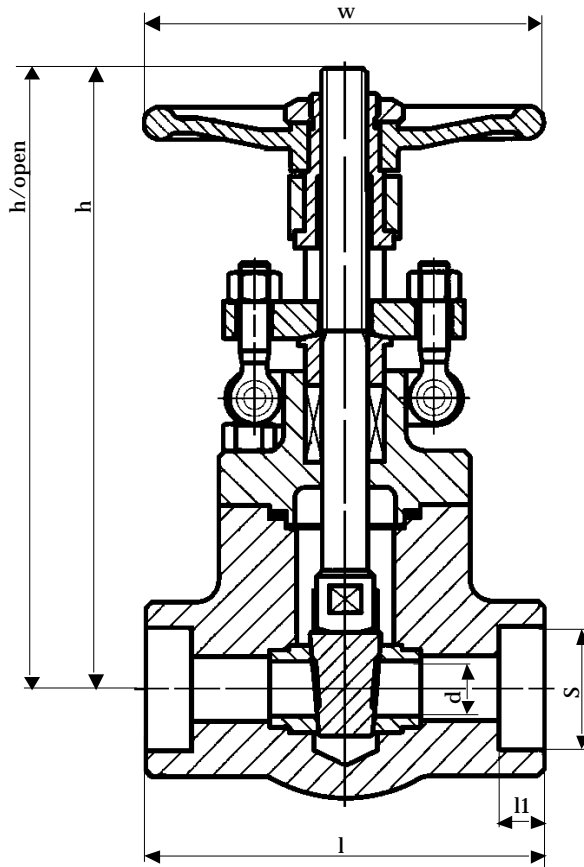

Andere Materialien auf Anfrage.
 Other materials on request.

Änderungen vorbehalten !
 Subject to change !

Applicable Standards
- Design and Manufacture: API 602
- Face to Face: Manufacturer's Standard
- Socket Welding Ends: ASME/ANSI B16.11
- Pressure Temperature Rating: ASME/ANSI 16.34
- Pressure Test: API 598
- Solid Wedge

Benennung	Designation	Material
Gehäuse	body	A105N
Dichtfläche	seats	A105+STL
Keil	wedge	A276-420
Haube	bonnet	A105N
Spindel	stem	A276-410
Dichtung	gasket	SS304+Graphit
Packung	packing	Graphit
Skt.-Schraube	hexagon screw	A193 B7

DN	Size	d	S	l1	l	w	h	h/open	U / Hub	kg
15	1/2"	10	21,8	9,7	79	100	145	160	3,5	2,3
20	3/4"	13	27,1	12,7	92	100	150	165	4	2,5
25	1"	18	33,8	12,7	111	120	180	200	5	4,4
40	1 1/2"	29	48,7	12,7	120	160	210	250	5,5	7,2
50	2"	36,5	61,1	15,9	140	180	250	285	6,5	11,0
65	2 1/2"	-	74,7	19	-	180	290	320	-	15,0